

DigivibeMX®

Vibration Analyzer, Data Collector &
Dynamic Balancer

The most complete, reliable and productive **Vibration Analyzer, Collector and Dynamic Balancer**



Only for illustrative purposes. Computer may be included for additional charge.

Overview


DigivibeMX platform is the most complete, reliable and productive vibration analyzer, collector & dynamic balancer. Digivibe provides simple and complex analysis on the spot, on-route and off-route. The Balancing functions can be used in-situ and on SBS balancing machines. The intuitive interface accommodates all levels of user - from novice to expert.

DigivibeMX Series

DigivibeMX M30: vibration analyzer, data collector and dynamic balancer.

DigivibeMX M20: vibration analyzer and data collector.

DigivibeMX M10: single and two-plane balancer.

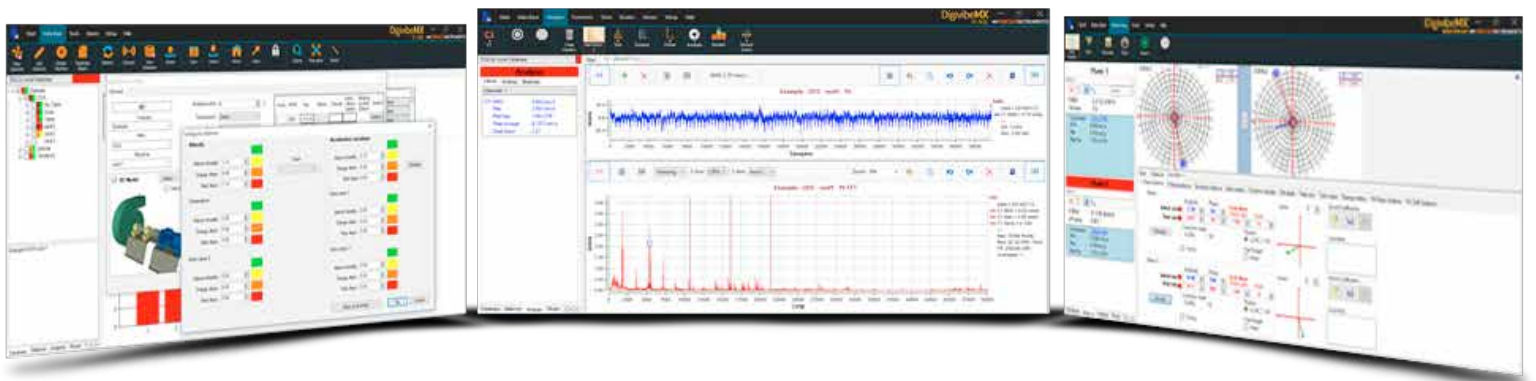

Advanced, but simple



Functions

M30

M20

M10

3D ODS Analysis	●	●	
FFT Spectra 3D Waterfall	●	●	
Dual Channel Functions	●	●	
FFT Spectra with 2 million lines of resolution	●	●	
Lines and columns tendency (octaves)	●	●	
Statistical machinery condition	●	●	
Barcode generator	●	●	
Easy-to-use and understand ISO color alarm coding	●	●	
Intelligent Analysis	●	●	
Large Bearing Database	●	●	
Synchronize with other users easily	●	●	
Export to ASCII, WAV, UFF-58	●	●	
Gear calculator	●	●	
4 Channel, Trial Capable Option	●	●	●
Analysis and Balancing Reports (CSS, Word, Excel)	●	●	●
Multi-language	●	●	●
Balancing in-situ in 1 and 2 planes	●		●
Balancing calculator with 12 functions	●		●
Balancing without trial weights	●		●



Take a shot.
Get the data.


DigivibeMX can easily identify your machines using our embedded barcode generator and reader.

¹Available on M20 & M30


Advanced Analysis M30 M20 M10 Dual Channels M30 M20

Advanced features allow you to diagnose complex problems in machinery and structures. Helps to prevent high costs of machine downtime, collateral damage, and unplanned repairs.

The most common tool are:

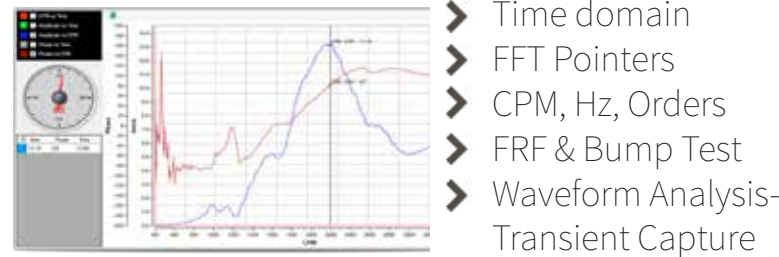

The Dual Channel function offers the advantages of reducing data collection time and providing information that cannot be obtained with single-channel analysis.

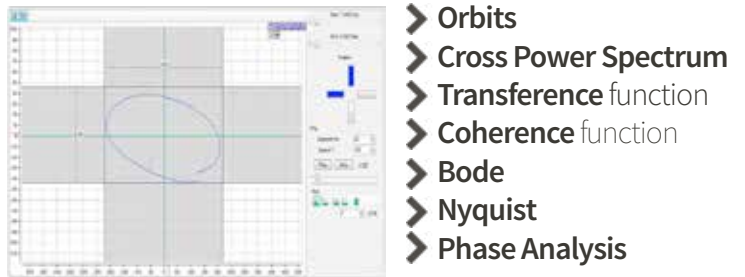


Bearings and Gears M30 M20

DigivibeMX has a expandable data base with failure frequencies of more than 23,000 bearings. It also includes functions for frequencies calculation and analysis of gear boxes.


Designation	Type	Internal diameter	External diameter	Width	Dynamic load rating kN	Static load rating kN	Fatigue load limit kN	Reference speed
623	1 HB	3	10	4	0.54	0.18	0.007	130000
623-2RS1	1 HB	3	10	4	0.54	0.18	0.007	-
623-2Z	1 HB	3	10	4	0.54	0.18	0.007	130000
623-RS1	1 HB	3	10	4	0.54	0.18	0.007	-
623-Z	1 HB	3	10	4	0.54	0.18	0.007	130000
618/4	1 HB	4	9	2.5	0.54	0.18	0.007	140000
628/4-2Z	1 HB	4	9	3.5	0.54	0.18	0.007	140000
638/4-2Z	1 HB	4	9	4	0.54	0.18	0.007	140000
619/4	1 HB	4	11	4	0.715	0.232	0.0098	130000
619/4-2Z	1 HB	4	11	4	0.715	0.232	0.0098	130000
604	1 HB	4	12	4	0.806	0.28	0.012	120000
604-2Z	1 HB	4	12	4	0.806	0.28	0.012	120000
604-Z	1 HB	4	12	4	0.806	0.28	0.012	120000

Machinery Data Bases M30 M20

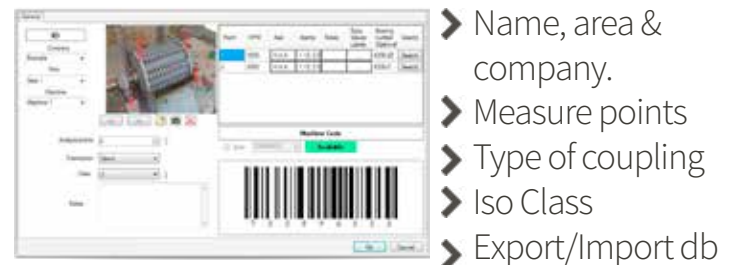

Compatibility M30 M20




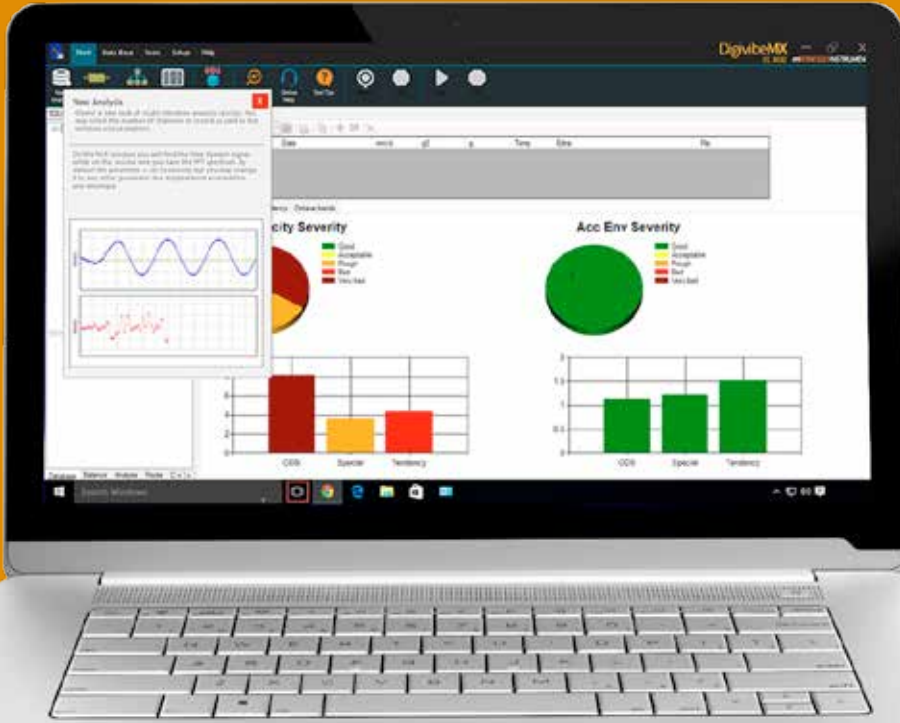

Functions and Tools that allow you to diagnose the true status of your machines.

Predictive Analysis Tools M30 M20


ESPECTRO EN CASCADA

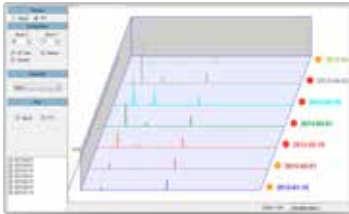

DigivibeMX allows users to analyze all kinds of machinery with tools like:

- Machinery database and route collection capability
- Database with more than 23,000 bearings & a gear calculator
- Diagnosis Interpretation tool
- Cascade Spectra
- 3D ODS

FFT Spectra M30 M20 M10

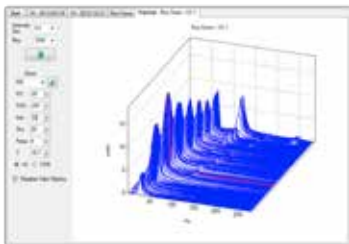



The spectral analysis tools in DigivibeMX are based on the FFT algorithm and able to measure very low frequencies from 0.4 Hz up to 30 kHz. The precision of the spectra adjusts based upon the point definition and can achieve up to 2 million lines of resolution.

- Spectra with up to 2 million lines of resolution
- Spectrogram
- 3D Spectra
- Pointers & cursors Zoom
- In - Zoom Out Markers
- FFT Averaging

Dynamic balancing in 1 and 2 planes M30 M10

- Balance without trial weights
- 2 Polar graphs
- Calculator with 12 functions:


- Add or remove weight
- Separate or combine weights
- Trial weights
- Serial Balancing (without trial weights)
- Drill calculation
- Residual Imbalance
- Degree of quality
- Intelligent Machine Wizard
- Balancing Report

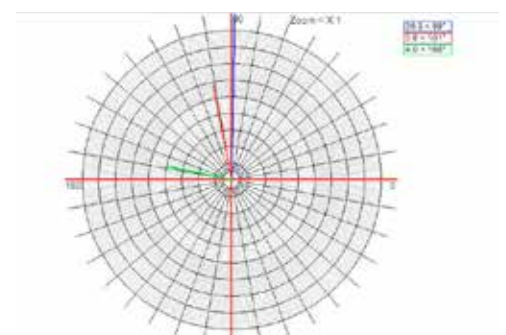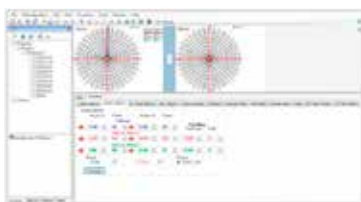

ODS Function

M30 M20

ODS analysis is an easy task. Create a 3D machine model in 3D design software (3DS Max, Blender, Solid Works, Windows 3D Builder that comes free with Windows 10 etc). Import the model to DigivibeMX and generate a customized ODS analysis. The phase analysis also calculates the coherence between signals, cross power and transference to ensure that all recorded signals are consistent. 3D ODS simulations can be easily exported to AVI video or an animated GIF for presentation.

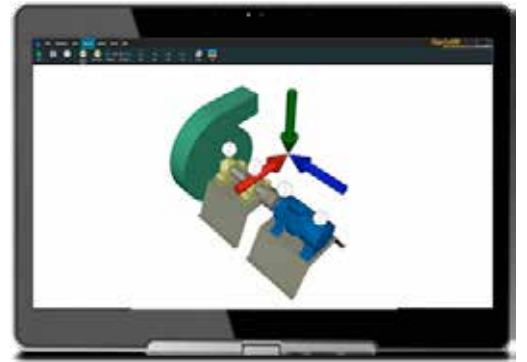

3D Cascade

M30 M20

The FFT graphic in 3D cascade (waterfall) is a spectral representation showing how collected data may vary over time. DigivibeMX includes a tool that generates this graph easily, with the ability to rotate and zoom - as in any 3D software.



System requirements

to install and use Digivibe software:

- › Minimum 1.6 GHz processor
- › Minimum 2 GB RAM
- › Windows 10 (also compatible with Windows 8.1 and Windows 7*)
- › Minimum monitor quality - SVGA
- › Touch screen compatibility supported
- › 300 MB free disk space
- › 1 USB 2.0 port

* Not compatible with Windows RT.



DigivibeMX includes:

2-Channel Interface



- 4-pin connectors (1-A, 1-B, 2) for 24V accelerometers
- 5-pin connector (Op) for Optical Sensor
- Cable with USB connector (45cm)
- Weight 230g
- Dimensions (mm): 60(d) x 90(w) x 30(h)
- Maximum Frequency: 24 kHz

Cables



Calibrator



Soft Case & Magnetic Stand*

Installation CD & User Manual



*Only M10 & M30

Two 100 mV/g Accelerometers



- Dynamic Impact Shock: 80g peak (max shock 5000g)
- Freq. response (+/- 3dB): 0.32 - 13000 Hz
- Freq. response (+/- 5%): 2 - 10000 Hz
- Sensitivity: 100 mV/g +/- 10%
- Transverse sensitivity: < 5%
- Power supply: 18-30 V / 3-8 mA
- Short-circuit protection
- Operation temp.: -10 - 50 °C
- Protection grade: IP 67, III
- Impact resistance: IEC 60028-27
- Standard 2-Pin MIL connector
- Magnetic Base w/neodymium magnet
- Weight 50g
- Stainless steel body

Laser Optical Sensor



- Analogic output / Range: 1 - 5000 Hz
- Power and current supply: 5V , 20 - 30 mA.
- Voltage drop: <0.4 V
- Short circuit, Reverse Voltage and Over-Voltage (15V for 1min) protection
- Operation distance: up to 15 m
- Operating temp: -10 - 50 °C
- Storing temp: -40 - 85 °C
- Protection grade: IP 67, III
- Impact Resistance: IEC 60028-27
- Weight 60 g
- Nylamid body

Software highlights

- Displacement: 0.5 um to 30 mm (0.02 to 1200 mils)
- Velocity: 0.002 to 3000 mm/s (0.0001 to 120 in/s)
- Acceleration: 0.0001 to 100 G's PP
- Lines of resolution: > 1,000,000
- FFT windows: Rectangular, Hanning, Hamming, Flaptop, Blackman, CosSum, Bartlett, Kaiser
- Measures: 0-Peak, Peak to Peak, RMS

Accessories

Triaxial Accelerometer



Ideal for measurement of the X, Y and Z axis simultaneously for 3D analysis, dual functions and data collection.

* Requires a 4 channel interface

Digital Scale



200 g, 500 g & 1000 g

Magnetic base



4-Channel Interface



- 4 Channel Interface measures with a maximum frequency of 48 kHz.
- Supports 4 single-axis accelerometers, or 1 triaxial accelerometer and 1 laser optical sensor

Weight:220g
Dimensions:129x84x19mm



ROKADE ROTEK INDIA PVT. LTD.

R - 375, TTC INDL AREA, RABALE MIDC, NAVI MUMBAI - 400701

EMAIL: SALES@ROKADEGROUP.COM

PHONE: 022 - 2173 7777

MOB: +91 88988866222

ALL IMAGES ARE FOR ILLUSTRATIVE PURPOSES ONLY. THE FINAL PRODUCT MAY VARY DEPENDING
ON THE VERSION AND/OR THE IMPROVEMENTS MADE TO THE DEVICES OR COMPONENTS

© 2017 ERBESSD RELIABILITY INSTRUMENTS

C-2017.0321.09